



zPAR™ 30Short

Ultra Light, Non-DIMMABLE



PRODUCT SUMMARY

- Fixed Wattage
- Non-Dimmable
- Multiple Color Temperatures Available
- Custom Optics
- High Color Rendering
- Proprietary Crimpfin Heatsink Design
- Designed to last 50,000 hours
- 5 year limited warranty
- Halogen PAR form factor (ANSI compliant)
- No UV or IR radiation
- Voltage: 120v/220v
- 0.9 Power Factor
- Socket Type: Medium Screw Base
- Environment: Dry
- Length: 3.6 in, 92 cm
- Diameter: 3.75 in, 95mm
- Weight: 7.05 ounces, 200g
- Operating Temperature -20° C + 45° C

SPECIAL ORDER ONLY HIGH POWER

The high power zPAR30S lamps from MSi are 14W LED replacement bulbs, which exceed the light output of a 100-watt halogen PAR lamp. This amazing lamp brings together the latest innovation and experience from MSi's multiple engineering disciplines, to deliver the complete solution for retail, hospitality, furniture, museum and commercial applications.

120~
220~
MEDIUM
2700K
3000K
4000K
15°
25°
40°
UV
No UV





CATALOG	POWER	CCT (K)	CRI	BEAM ANGLE	LUMENS	CBCP
zPAR30S271514T3N	14W	2700	82	15°	1050	12,000
zPAR30S272514T3N				25°		5,200
zPAR30S274014T3N				40°		2,150
zPAR30S301514T3N	14W	3000	82	15°	1150	13,000
zPAR30S302514T3N				25°		5,750
zPAR30S304014T3N				40°		2,300
zPAR30S401514T3N	14W	4000	82	15°	1250	13,500
zPAR30S402514T3N				25°		6,250
zPAR30S404014T3N				40°		2,500



CANDELA DISTRIBUTION

BEAM DISTRIBUTION



0° AIMING FOOTCANDLES

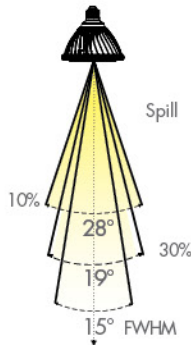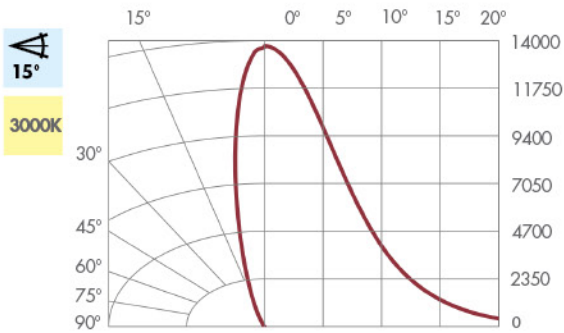

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	1.3'	520
10'	2.6'	130
15'	3.9'	58
20'	5.3'	33

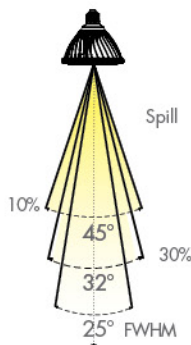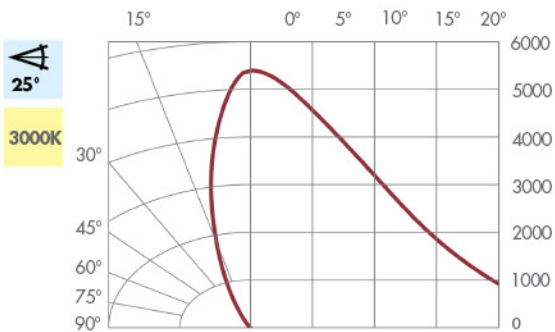

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	2.2'	230
10'	4.4'	57
15'	6.7'	25
20'	8.9'	14

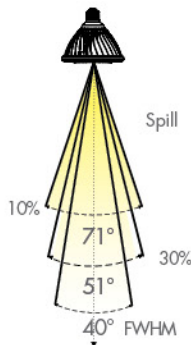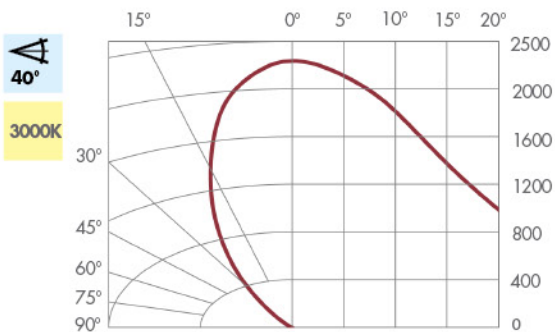

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	3.6'	92
10'	7.3'	23
15'	10.8'	10
20'	14.4'	5.5

CAUTION: Risk of electric shock. Do not open – no user serviceable parts inside. Use in dry locations only. Turn power off before inspection, installation or removal. Not intended for use with emergency exit fixtures or emergency exit lights. Not for use where exposed to the weather. Not for use with totally enclosed fixtures or fixtures that inhibit air flow.

WARRANTY: This product is covered by a 5-year limited warranty under normal operating conditions based on 12 hours of usage per day. For details please visit www.msissl.com.