




ZT8 Replacement Tube

TRUE ALL-IN-ONE

GEN II

20% LONGER LIFE*

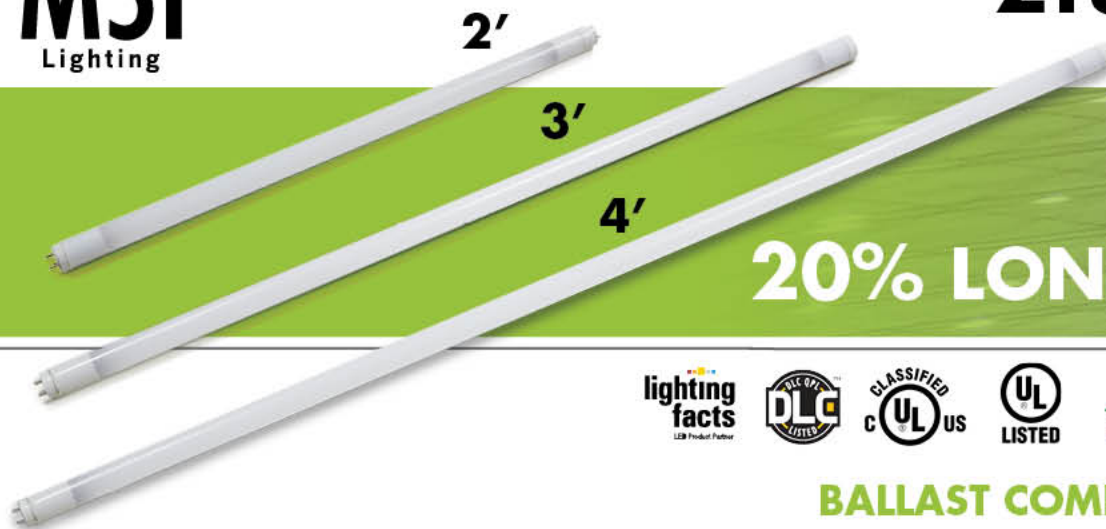

PRODUCT SUMMARY


- 60,000 Hour L70*
- Smooth Diffusion
- No Hot Spots/No Dark Spots
- Multi Voltage 120/220/277
- Suitable for Damp Locations
- Wide Beam
- 5 Year Warranty
- Uniform Light Distribution
- Shatterproof
- Contains no Mercury
- Impact Resistant

BALLAST COMPATIBLE

- Instant Start
- Rapid Start
- Program Start
- Quick Start
- No Rewiring Required
- 120v-277v
- Low THD <10%
- High Power Factor

LINE VOLTAGE COMPATIBLE (universal)

- 120v-277v
- Low THD <10%
- High Power Factor
- ZT8 By Pass Kit Available

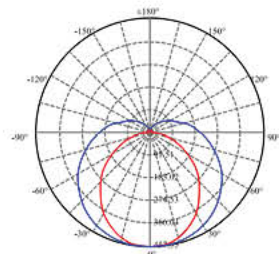

165 degree beam / 285 degree field

120~

220~

277~

3500K

4100K

5000K
COMING
SOON

4'

3'

2'



CATALOG	POWER	CCT (K)	LENGTH	CRI	LUMENS
zT82435123E-X	10W	3500	2'	80	1000
zT82441123E-X	10W	4100	2'	80	1000
zT83635153E-X	13W	3500	3'	80	1400
zT83641153E-X	13W	4100	3'	80	1400
zT84835183E-X	18W	3500	4'	80	2000
zT84841183E-X	18W	4100	4'	80	2000

• -X = Ballast and Line Compatible

• -B = Ballast Only

• -L = Line Only